

HTB-gietijzeren eindkap EKT + EKFT

Voor stalen buis: DIN EN 10255 (vroeger DIN 2440/2441), DIN 2442 en DIN 2448/DIN 2458 serie 1, ISO 65

- **Middelen:** Gas
- **Temperaturen:** Gas: -20 tot +60 °C



21,3 mm–60,3 mm:

- **Druktrappen:** Gas PN 5
- **Tests:** Gas: DIN 3387-1, DVGW-reg.-nr.: NG-4502AP1417



76,1 mm:

- **Druktrappen:** Gas PN 1
- **Tests:** Gas: DIN 3387-1, DVGW-nr.: NG-4502AP1474


DN	Buisbuiten-Ø [mm]	Art.-nr.
15	21,3 (1/2")	01.180.07.01
20	26,9 (3/4")	01.180.07.02
25	33,7 (1")	01.180.07.03
32	42,4 (1 1/4")	01.180.07.04
40	48,3 (1 1/2")	01.180.07.05
50	60,3 (2")	01.180.07.06
65	76,1 (2 1/2")	01.225.07.07

Afmetingen en gewichten

DN	Buisbuiten-Ø [mm]	Gewicht [kg]	Constructielengte ~A [mm]	Sleutelwijdte resp. afmeting Flensdeksel ~SW [mm]	Overhoekse maat ~e [mm]	Inschuifdiepte min. [mm]	max. [mm]
15	21,3	0,2	51	41	44	30	40
20	26,9	0,4	53	50	54	30	40
25	33,7	0,5	55	55	60	35	40
32	42,4	0,8	61	70	76	40	45
40	48,3	0,9	63	75	81	40	50
50	60,3	1,4	72	90	97	40	55
60	76,1	3,2	118	100	150	50	90

Schroefkoppeling voor stalen buis

21,3 mm–60,3 mm

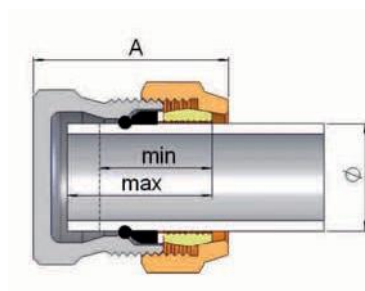

76,1 mm

