

HTB-gietijzeren klemkoppelingen OT + OFT

Klemaansluiting aan beide zijden

Voor stalen buis: DIN EN 10255 (vroeger DIN 2440/2441), DIN 2442 en DIN 2448/DIN 2458 serie 1, ISO 65

- **Middelen:** Gas
- **Temperaturen:** Gas: -20 tot +60 °C



21,3 mm–60,3 mm:

- **Druktrappen:** Gas PN 5
- **Tests:** Gas: DIN 3387-1, DVGW-reg.-nr.: NG-4502AP1417



76,1 mm–114,3 mm:

- **Druktrappen:** Gas PN 1
- **Tests:** Gas: DIN 3387-1, DVGW-nr.: NG-4502AP1474


DN	Buisbuiten-Ø		Art.-nr.
	[mm]		
15	21,3 x 21,3	(1/2")	01.180.02.01
20	26,9 x 26,9	(3/4")	01.180.02.02
25	33,7 x 33,7	(1")	01.180.02.03
32	42,4 x 42,4	(1 1/4")	01.180.02.04
40	48,3 x 48,3	(1 1/2")	01.180.02.05
50	60,3 x 60,3	(2")	01.180.02.06
65	76,1 x 76,1	(2 1/2")	01.225.02.07
80	88,9 x 88,9	(3")	01.225.02.08
100	114,3 x 114,3	(4")	01.225.02.09

Afmetingen en gewichten

DN	Buisbuiten-Ø [mm]	Gewicht [kg]	Constructielengte ~A [mm]	Sleutelwijdte resp. afmeting Flensdeksel ~SW [mm]	Overhoekse maat ~e [mm]	Inschuiptdiepte	
						min. [mm]	max. [mm]
15	21,3	0,5	100	41	44	30	70
20	26,9	0,7	100	50	54	30	70
25	33,7	0,8	100	55	60	35	65
32	42,4	1,4	115	70	76	40	70
40	48,3	1,6	115	75	81	40	75
50	60,3	2,2	130	90	97	40	85
65	76,1	5,2	155	./.	150	50	95
80	88,9	6,0	170	./.	160	50	105
100	114,3	7,6	170	./.	180	50	105

Schroefkoppeling voor stalen buis

21,3 mm–60,3 mm

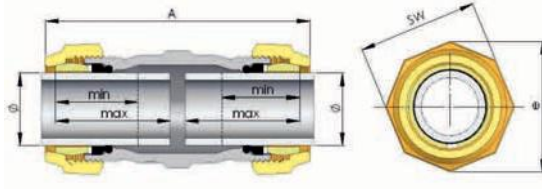

76,1 mm–114,3 mm

