





C-MAV-R Pressure Gauge Connector

Female BSPP Thread /
24° Tube Connection (DIN EN ISO 8434-1)



C-MAVE

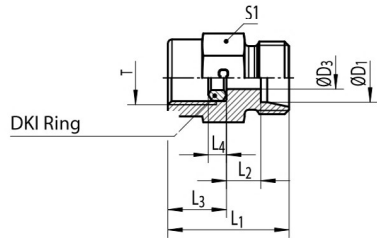

Series	PN [bar]		ØD ₁ [mm]	T	ØD ₃ [mm]	L ₁ [mm]	L ₂ [mm]	L ₃ [mm]	L ₄ [mm]	L ₅ [mm]	S1 [mm]	S2 [mm]	Ordering Code*	kg/100
	C	CF												
LL	100	100	4	G1/4	2.5	27	8.5	14.5	4.5	33	19	10	C-MAV 04 LLR OMD	3.5
L	315	315	6	G1/4	2.5	29	7.5	14.5	4.5	37	19	14	C-MAV 06 LR OMD	3.8
			8	G1/4	5.5	29	7.5	14.5	4.5	37	19	17	C-MAV 08 LR OMD	3.9
			10	G1/4	5.5	30	8.5	14.5	4.5	38	19	19	C-MAV 10 LR OMD	4.1
			12	G1/4	5.5	30	8.5	14.5	4.5	38	19	22	C-MAV 12 LR OMD	4.3
S	630	630	6	G1/2	3.5	38	11	20	5.0	46	27	17	C-MAV 06 SR OMD	9.0
			8	G1/2	3.5	38	11	20	5.0	46	27	19	C-MAV 08 SR OMD	9.3
			10	G1/2	7.5	38	10.5	20	5.0	47	27	22	C-MAV 10 SR OMD	9.3
			12	G1/2	7.5	38	10.5	20	5.0	47	27	24	C-MAV 12 SR OMD	9.6

*Replace the character "C" with "CF" when you require steel!
C = Stainless Steel, 1.4571 CF = Galvanized Steel Cr(VI)-free